

⚡ Specifications

Nominal Voltage(V)

12V

Nominal Capacity

20 hour rate	(1.2A to 10.50V)	24Ah
10 hour rate	(2.28A to 10.50V)	22.8Ah
5 hour rate	(4.08A to 10.20V)	20.4Ah
1 C	(24A to 9.60V)	13.6Ah
3 C	(72A to 9.60V)	9.6Ah

Weight

Approx. 7.14kg(15.7Lbs.)

Internal Resistance (at 1KHz)

Approx. 8 mΩ

Maximum Discharge Current for

5 seconds: 360A

Charging Methods at 25°C(77°F)

Cycle use:	
Charging Voltage	14.4 to 15.0V
Coefficient -5.0mV/°C/cell	
Maximum Charging Current :	7.2A
Standby use:	
Float Charging Voltage	13.5 to 13.8V
Coefficient -3.0mV/°C/cell	

Operating Temperature Range

Charge	-15°C(5°F) to 40°C(104°F)
Discharge	-15°C(5°F) to 50°C(122°F)
Storage	-15°C(5°F) to 40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month	97%
3 month	92%
6 month	85%

Case Material

ABS UL94 HB
Option: Flammability resistance of (UL94 V-0)

Terminal

F6




⚡ Dimensions

Length (L)	181 ± ² ₁ (7.13 ± ^{0.08} _{0.04})
Width (W)	77.5 ± ² ₁ (3.05 ± ^{0.08} _{0.04})
Height (H)	169 ± ² ₁ (6.65 ± ^{0.08} _{0.04})
Overall Height (HT)	169 ± ² ₁ (6.65 ± ^{0.08} _{0.04})


Description of torque value of hardware for the terminals:

Recommended torque value	M5: 4 N-m (41kgf-cm)
Maximum allowable torque value	M5: 6 N-m (61kgf-cm)


mm(inch)

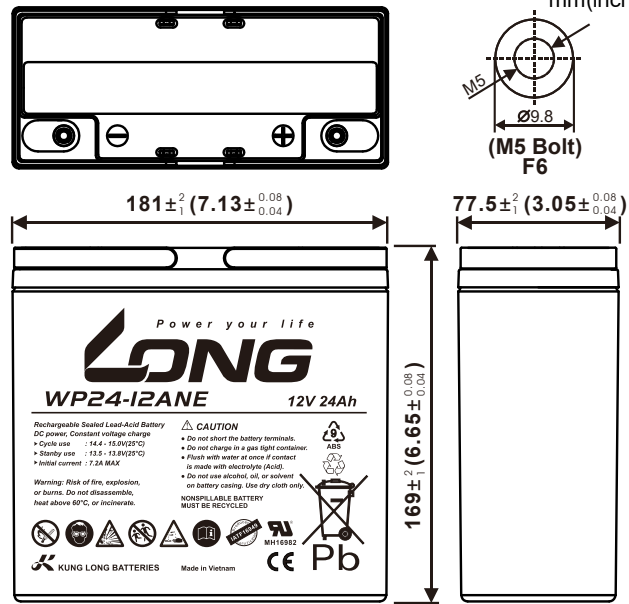


Effect of Temperature on Capacity 25°C(77°F)

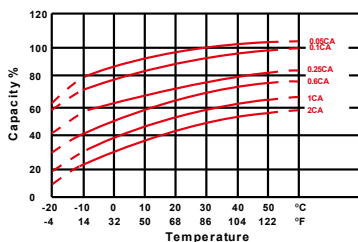


Capacity Retention Characteristic



Cycle Service Life



Discharge Time VS. Discharge Current (25 °C)

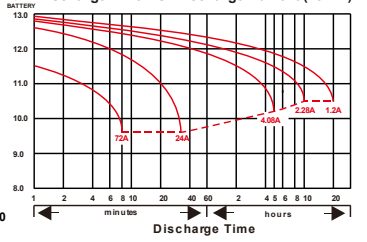

230924-1J